



BDJ STANDARD

BDJ Standard is a professional blowing machine designed for blowing microcables. A solid and simple construction ensures easy operation and a longevity of the unit. Machine is equipped with a high quality belt feeder and pneumatic motors. Basic version has a mechanical counter meter pre-installed. Upon request we provide electronic counter with a speed measurement function. **Also available: a direction switch to retract the cable or change the blowing direction in BDJ Standard Extended set-up.**

Blowing range:

- **cable diameter** Ø 4 mm -10 mm
- **duct diameter** Ø 5, 7, 10, 12, 14, 16 mm






BDJ STANDARD

Accessories included inside the set

- A set of clamping sleeves for microducts and cable guides;
- A set of gaskets for each cable and microduct size;
- Air hose $\frac{3}{4}$ " 10m;
- Transport box;
- Handle for carrying the machine;
- A set of calibrating balls;
- Key 13 for closing the head;
- Key 5 for closing the head;
- Prelube 5000;
- Plates calibrating the position of the head;
- Air motor oil - sample;
- Instruction.

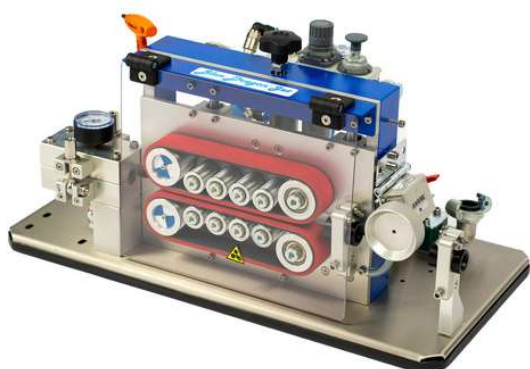

TECHNICAL DATA

MICRO CABLE DIAMETER	4 mm – 10 mm
MICRO TUBE DIAMETER	5 mm – 16 mm
BLOWING DISTANCE / MAX	2500 m
BLOWING SPEED / MAX	110 m/min
WORK PRESSURE / MAX	15 bar
DIMENSIONS OF THE UNIT (L X W X H)	580 x 300 x 320 mm weight approx. 20 kg
DIMENSIONS OF THE TRANSPORT TRUNK	640 x 390 x 410 mm weight approx. 33 kg
AVAILABLE ACCESSORIES	• lubricant PRELUBE 5000 (240 ml) • pneumatic oil sample • micro duct cutter • set of bushings • set of gaskets • set of Allen keys • socket wrench • air hose
REQUIRED COMPRESSOR'S EFFICIENCY	• micro ducts up till 8 mm - 0,8 m3/min • micro ducts 8 - 12 mm - 1,0 m3/min • micro ducts 12-16 mm - 1,5 m3/min • micro ducts 15-20 mm - 3,5 m3/min

REQUIRED COMPRESSOR: KAESER M17A