



BDJ MINI COUNTER




BDJ Mini cable blowing machine is dedicated for **last miles of FTTH network**. Very effective, versatile and easy to use. The blowing machine is equipped with sleeves (bushings) allowing blowing micro cables from 0,8 mm up. This manual unit is motorless, so it requires external power source, e.g. a cordless drill/driver. The roller drive (feeder) is equipped with removable rubber bands, which can be easily exchanged once they wear off. **Also available: BDJ Mini Counter with a electronic length counter.**

Blowing range:

- **cable diameter** Ø 0,8 mm - 10 mm
- **microduct diameter** 5, 7, 10, 12, 14, 16 mm

Available accessories inside the set:

- A set of gaskets, sleeves for microducts;
- 10 meters air hose;
- 2 x compressor adapter;
- Allen key set;
- Socket wrench 13 for the head;
- A set of calibrating balls;
- 2 pcs of hard tires per roll;
- 8. Cutter for microducts;
- 9. Transport box;
- 10. Prelube 5000;
- 11. Manual.

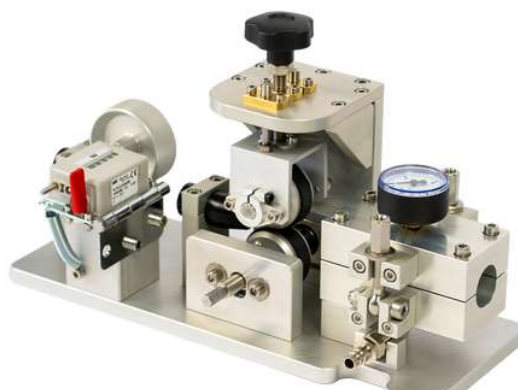

TECHNICAL DATA

MICRO CABLE DIAMETER	0,8 mm – 10 mm
MICRO TUBE DIAMETER	5 – 16 mm
BLOWING DISTANCE / MAX	1000 m
BLOWING SPEED / MAX	110 m/min
WORK PRESSURE / MAX	15 bar
DIMENSIONS OF THE UNIT (L X W X H)	260 x 160 x 230 mm waight approx. 5 kg
DIMENSIONS OF THE TRANSPORT TRUNK	480 x 350 x 330 mm waight approx. 15 kg
ACCESSORIES INSIDE THE SET	• Lubricant PRELUBE 5000 (240 ml) • Micro duct cutter • Set of bushings • Set of gaskets • Set of Allen keys • Socket wrench • Spare rubber bands for the roller drive • Mechanical counter • Air hose
REQUIRED COMPRESSOR'S EFFICIENCY	• micro ducts up till 8mm 0,8m³/min • micro ducts 8-12mm - 1,0m³/min • micro ducts 12-16mm - 1,5m³/min

REQUIRED COMPRESSOR: KAESER M17A